# Incredible HDR Home Entertainment Projection HD27HDR



# Enhanced 1080p projection with outstanding color and contrast





Embrace HDR technology and large screen experiences with the 3,400 lumen HD27HDR 1080p home entertainment projector. Its HDMI 2.0 with HDCP 2.2 input and 50,000:1 contrast ratio accept HDR10 content for brighter whites and deeper black levels with vivid colors and an unmatched 1080p viewing experience.

An enhanced Gaming Mode, compatible with 1080p HDR sources, reduces input lag to 16ms for lightning-fast response when connected to the latest HDR-ready gaming consoles and PCs. Full 3D 1080p support enables immersive cinematic experiences in movies and games.

Vertical keystone and a 1.1x zoom allow for flexible mounting and installation. Up to 15,000 hours of lamp life ensures long-term reliability for years of entertainment with minimal maintenance.

# **CONNECTIVITY** (May require optional accessories)



Smart



Tablets

3D Blu-ray/DVD Players







Computers

Smart Phones



Camcorders

Apple TV®

Chromecast™

## **OPTICAL/TECHNICAL SPECIFICATIONS**


OF HOAL/TECHNICAE SPECIFICATIONS		
Display Technology	Texas Instruments 0.65" 1080p DMD	
Color Wheel	6 segment RYGCWB	
Native Resolution	1080p (1920 x 1080)	
Maximum Resolution	4K UHD (3840 x 2160)	
Brightness	3,400 ANSI lumens	
Contrast Ratio	50,000:1	
Displayable Colors	1.07 billion	
Lamp Life*	15,000/10,000/6,000 (Dynamic/ECO/Bright)	
Light Source Type*	203W lamp	
Projection Method	Front, rear, ceiling mount, table top	
Keystone Correction	± 40° vertical	
Uniformity	80%	
Offset	116%±5%	
Aspect Ratio	16:9 (native), 4:3, 16:10 and LBX compatible	
Throw Ratio	1.48 - 1.62	
Projection Distance	3.2' - 35.91' (without zoom)	
Image Size	28" - 305.3"	
Projection Lens	F=2.5 ~ 2.67, f=21.86 ~ 24mm (manual focus)	
Optical Zoom	1.1x	
Audio	10W speaker	
Noise Level	26dB	
Remote Control	Full size remote	
Operating Temperature	41–104°F (5–40°C), 85% max humidity	
Power Supply	AC input 100 - 240V, 50 - 60 Hz, auto-switching	
Power Consumption	236W typical, 260W max (Bright mode), 216W typical, 216W max (Eco mode)	
High Altitude	Operating temp @ sea level up to 10000 feet = 41°F (max); must manually switch to high altitude mode @ 5,000 feet & above (using OSD)	

# **COMPATIBILITY SPECIFICATIONS**

Computer Compatibility	UHD, FHD, HD, WXGA, UXGA, SXGA, XGA, SVGA, VGA, Mac
Video Input Compatibility	PAL (B, D, G, H, I, M, N, 576i/p), NTSC (M, 4.43/3.58 MHz, 480i/p), SECAM (B, D, G, K, K1, L) HD (1080i, 720p), 4K UHD
3D Compatibility <sup>†</sup>	Side-by-side:1080i50 / 60, 720p50 / 60 Frame-pack: WUXGA24, 720p50 / 60 Over-under: WUXGA24, 720p50 / 60
Vertical Scan Rate	24 - 120Hz
Horizontal Scan Rate	31 - 135kHz (120Hz for 3D)
User Controls	Complete on-screen menu adjustment in 27 languages
I/O Connection Ports	1 x HDMI (2.0 with HDCP 2.2), 1 x HDMI (1.4a), audio-out, 3D Sync port, USB power
Loop Through (Audio)	Yes

### **PHYSICAL SPECIFICATIONS**

Security	Security bar, Kensington© lock, password protection
Weight	6.2 lbs.
Dimensions (W x H x D)	12.44" x 4.27" x 9.7"

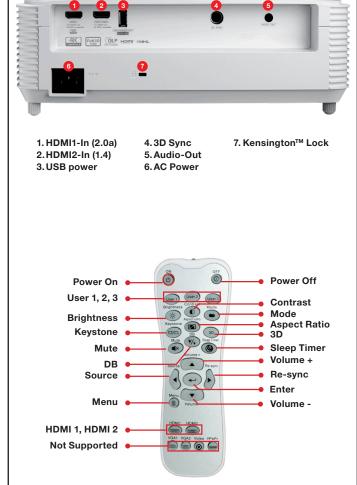

#### Warranty

1-Year parts and labor limited warranty on the projector, 90 days lamp warranty

#### What's in the Box

HD27HDR projector, AC power cord, remote control, batteries for remote, quick start card and warranty card

#### **Optional Accessories**

Universal ceiling mount, DLP®Link™ 3D glasses, lamp, remote

#### Accessory Part Numbers

Lamp: BL-FU200E Remote: BR-3003B DLP® Link™ 3D glasses: ZD302 Ceiling mount: OCM818B-RU Ceiling mount: BM-5001U Ceiling mount (with extensional pole): OCM815B

UPC 796435 81 314 7



# Optoma.com

\*Light source life is dependent upon many factors, including brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

<sup>†</sup>3D content can be viewed with DLP Link active shutter 3D glasses when projector is used with a compatible 3D player. Please visit Optoma.com for more information.

Copyright © 2019 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments<sup>™</sup>. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 11192019